

RoHS
COMPLIANT

SPECIFICATIONS

1. Current rating: 5A AC, DC
2. Voltage rating: 100V AC, DC
3. Temperature range: -40°C ~ +125°C
4. Insulation resistance: 100MΩ/ min.
5. Withstanding voltage: 1000V AC/ minute.
6. Contact resistance: 15mΩ/ max.

Material:

Insulator: Nylon 66 UL 94V-0


Lock: Stainless

Suitable: KR2023 series Housing

Ordering Code:

H20230 *** 02 11 A

106:6P

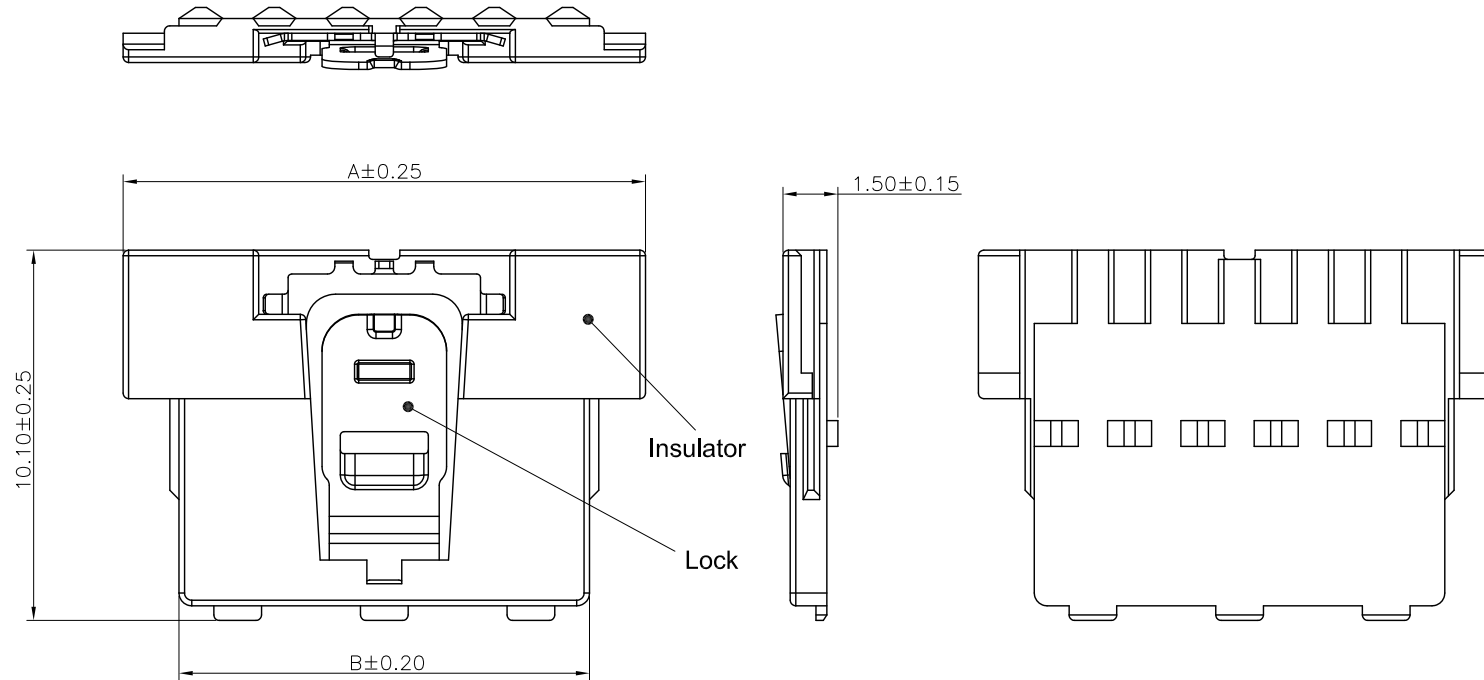

Circuits	Dimensions	
	A	B
2	/	/
4	10.25	7.00
6	14.25	11.20
8	/	/
10	/	/

				TOLERANCE	TITLE:		DRAWN: <i>zzk 2023.12.05</i>		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
				X.X ±0.30	ULH 2.0 TPA		CHECKED:					
				X.XX ±0.20			APPROVED:		PART NO.: H202301****11A			
				X.XXX ±0.10			SHEET: 1/1		PROJECTION		REV.: A01	
				Angle ±2°	UNIT: mm		SCALE: 1:1		DRAWING NO.: 2023H111-A-S			
MARK	REVISION DESCRIPTION	SIGNATURE	DATE									



设计初版

zzk

23.12.05