





**RoHS**  
COMPLIANT

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
  2. Temperature range: -40°C ~ +125°C
  3. Insulation resistance: 100MΩ min.
  4. Withstanding voltage: 1000V AC/ minute.
  5. Contact resistance: 5mΩ max.
- Material: 30%GF PBT UL 94V-0 (Orange)

H255602\*\* 05 02A

209=2X9P  
217=2X17P

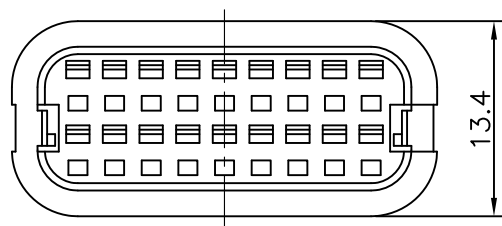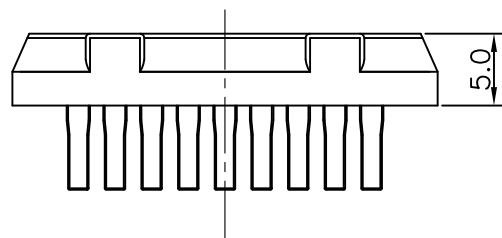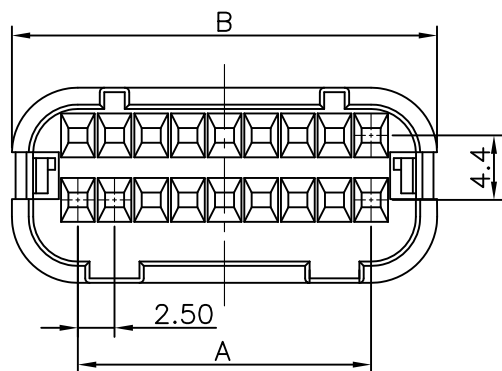

Pin No.	Dimensions	
	A	B
2x9	20.00	28.90
2x13	30.00	28.90
2x17	40.00	48.90

△A03

△A02

△A01

MARK

TOLERANCE  
X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
Angle ±2°

TITLE:  
Pitch 2.5  
Front Cap

UNIT:mm

SCALE:N/A

DRAWN: *LCC 2024.07.30*

CHECKED:

APPROVED:

SHEET: 1/1

PROJECTION

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H255602\*\*0502A

REV.: A01 DRAWING NO.: 2556H202-A-S