
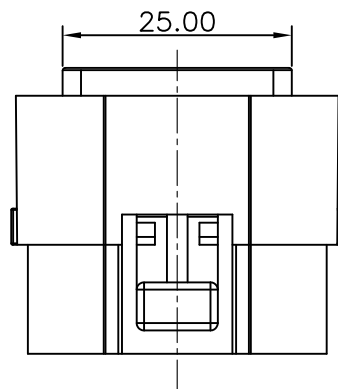
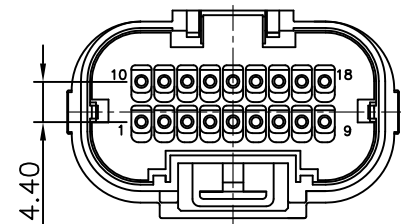

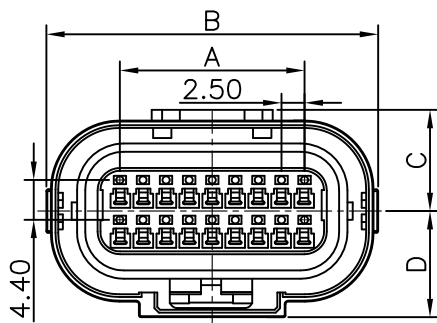


RoHS
COMPLIANT

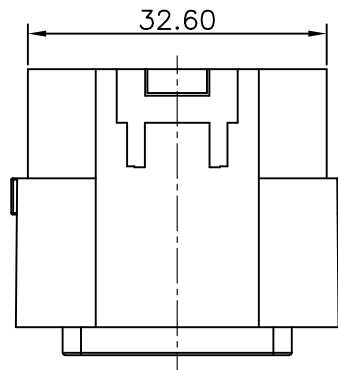

SPECIFICATIONS

1. Current rating: 3A AC, DC
2. Temperature range: -40°C ~ +125°C
3. Insulation resistance: 100MΩ min.
4. Withstanding voltage: 1000V AC/ minute.
5. Contact resistance: 5mΩ max.

Material:

- Insulator: Glass filled PBT(Black)
- Rear Cover: Glass filled PBT(Gray)
- Seal Ring: Silicone rubber(Blue)
- Grommet: Silicone rubber(Blue)

H255602** 05 01A

209=2X9P
217=2X17P

Pin No.	Dimensions			
	A	B	C	D
2X9	20.00	36.60	11.00	11.20
2X13	30.00	46.60	11.00	11.20
2X17	40.00	56.60	11.00	11.20

△A03			
△A02			
△A01			
MARK	REVISION DESCRIPTION	SIGNATURE	DATE
1			

TOLERANCE		TITLE:	
X.X	±0.30	Pitch 2.5	
X.XX	±0.20	Socket Housing	
X.XXX	±0.10		
Angle ±2°		UNIT:mm	SCALE:N/A

DRAWN:	LCC 2024.07.29
CHECKED:	
APPROVED:	
SHEET: 1/1	PROJECTION

KONNRA 东莞市康瑞电子有限公司	
DongGuan Konnra Electronics Co.,Ltd.	
PART NO.: H255602**0501A	
REV.: A01	DRAWING NO.: 2556H201-A-S