
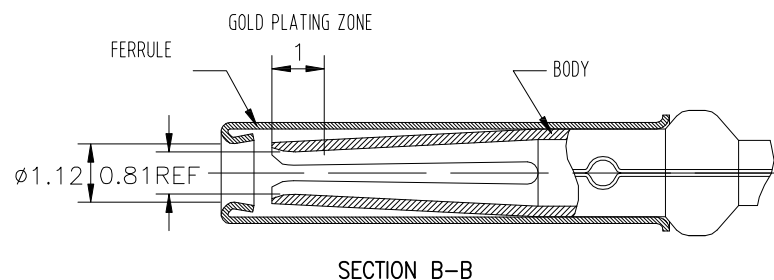
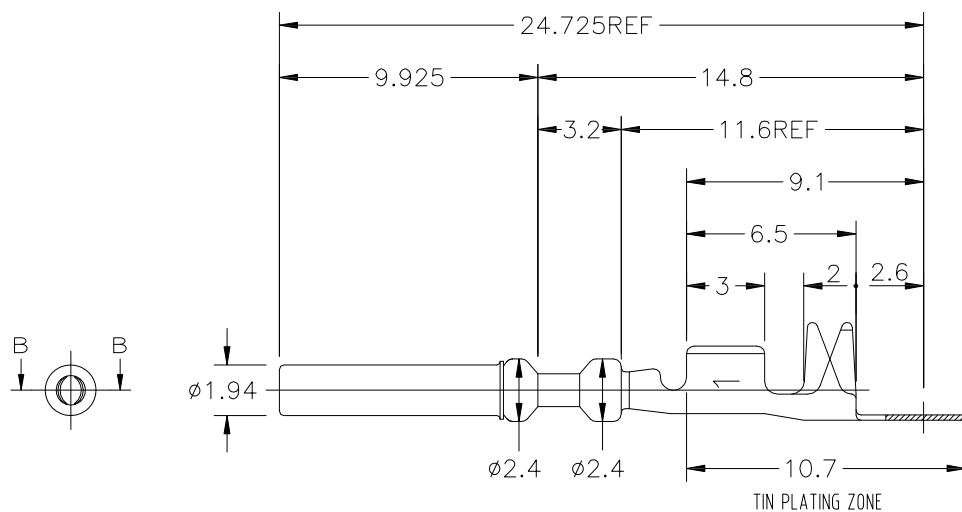
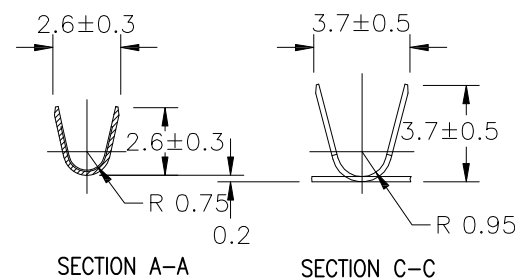


**RoHS**  
COMPLIANT

**SPECIFICATIONS**

1. Current rating: 3A AC, DC
  2. Voltage rating: 250V AC, DC
  3. Temperature range: -40°C ~ +125°C
  4. Insulation resistance: 100MΩ min.
  5. Withstanding voltage: 1000V AC/ minute.
  6. Contact resistance: 5mΩ max.
- Material: PBT UL 94V-0 Black  
Contact: Copper alloy  
Plating: Tin plated over Nickel

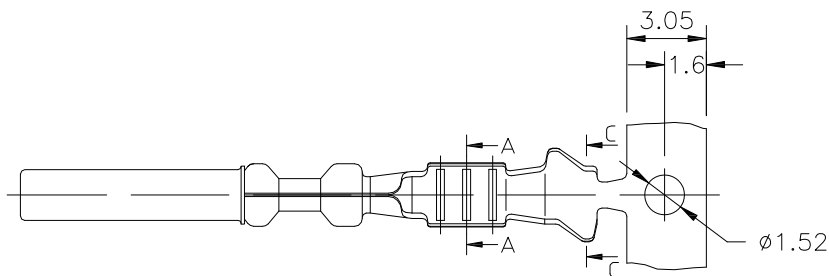

△A03

△A02

△A01

TOLERANCE  
X.X ±0.30  
X.XX ±0.20  
X.XXX ±0.10  
Angle ±2°

TITLE:  
Pitch 3.0  
Socket Connector

DRAWN: LCC 2024.07.25

CHECKED:

APPROVED:

**KONNRA** 东莞市康瑞电子有限公司  
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: T30040CT0101A

MARK	REVISION DESCRIPTION	SIGNATURE	DATE	UNIT:mm	SCALE:1:1	SHEET:1/1	PROJECTION	REV.:A01	DRAWING NO.:3004T001-A-S
1									

1

2

3

4

5

6

7

8

9