
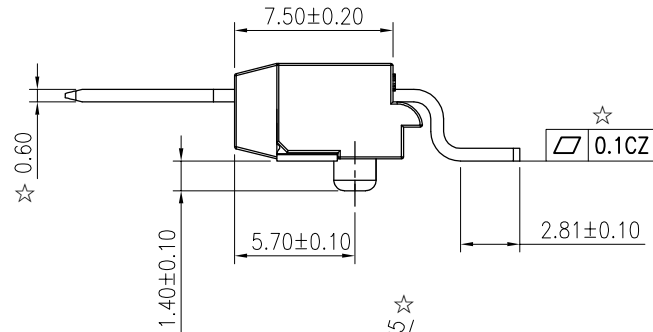



RoHS
COMPLIANT

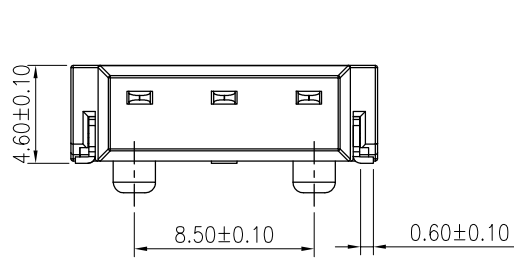



- ◆ SPECIFICATIONS
- Current rating: 3A AC, DC
 - Voltage rating: 250V AC, DC
 - Temperature range: -40°C ~ +125°C
 - Insulation resistance: 1000MΩ Min.
 - Contact resistance: 20mΩ Max.
 - Special feature size identification "☆"

Material:
 Insulator: LCP BLACK UL 94V-0
 Contact: QSn-6.5-0.1
 Solder Nail: Brass
 Plating: Tin plated over Nickel
 Circuits: 3P
 Mates: N/A

Ordering code:
C4203RS*13T0101RA**
 102: 2P
 103: 3P
 ...

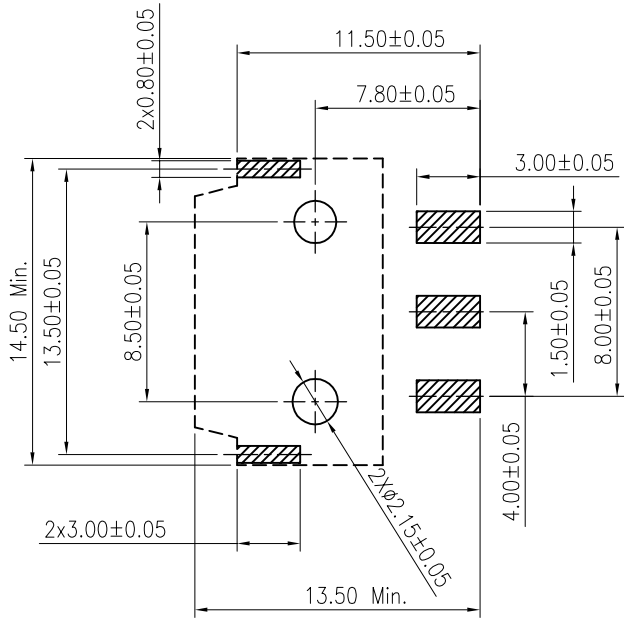

P.C.B. Layout

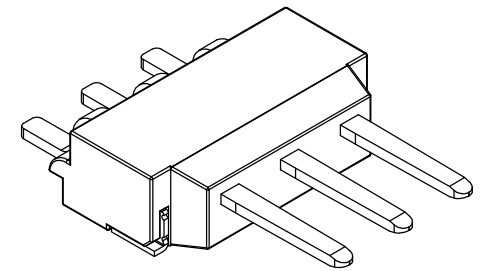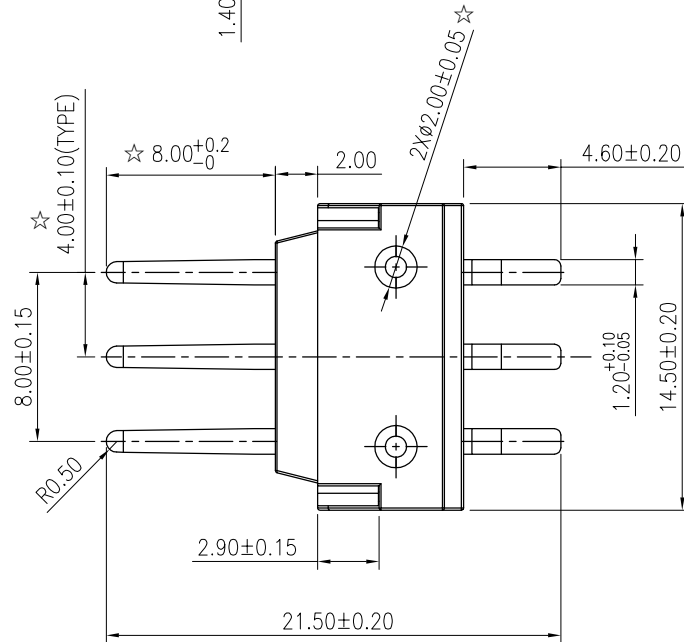

△A03			
△A02			
△A01	NEW	Liu	2023.08.11

TOLERANCE
 X.X ±0.30
 X.XX ±0.20
 X.XXX ±0.10
 Angle ±2°

TITLE:
 STER 3P Wafer

UNIT: mm SCALE: N/A

DRAWN: Liu2023.08.11
 CHECKED:
 APPROVED:

SHEET: 1/1 PROJECTION

KONNRA 东莞市康瑞电子有限公司
 DongGuan Konnra Electronics Co.,Ltd.

PART NO. : C4203RS10313T0101RA

VER. : A01 DRAWING NO. : 4203WRS01-A-S

LTR	REVISION DESCRIPTION	SIGNATURE	DATE
-----	----------------------	-----------	------