
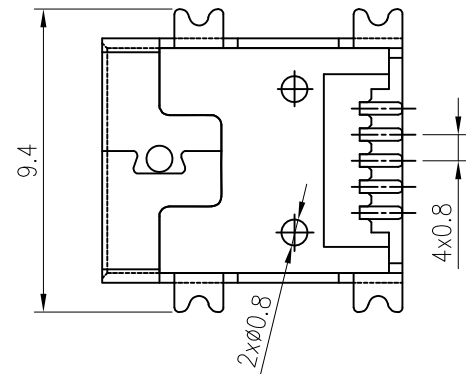
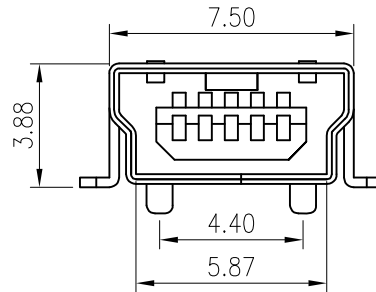
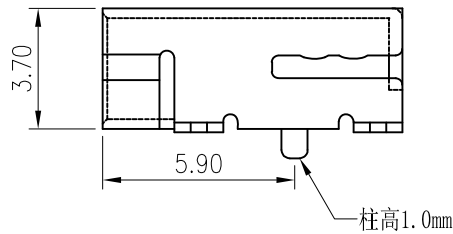


**RoHS**  
COMPLIANT

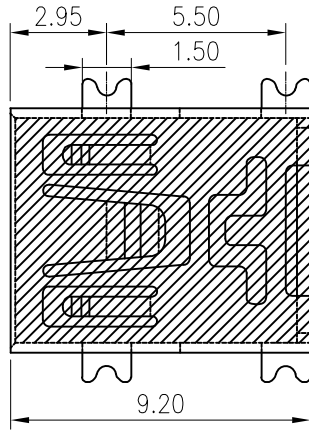


**SPECIFICATIONS**

1. Current rating: 1A AC, DC
2. Voltage rating: 30V AC,DC
3. Contact resistance: 50mΩ/ max.
4. Withstanding voltage: 300V AC/ minute.
5. Insulation resistance: 100MEGA ohms min.
6. Operating temperature: -30°C ~ +85°C
7. Storage temperature: -40°C ~ +60°C

**Raw material:**

Plastic cement: Hing Temperature Thermoplastics,LCP Black  
 Contact: Copper Alloy C2680/C5191  
 Shell: SPCC/Copper Alloy C2680  
**Electroplate:**  
 Contact: Plated Gold in Mating Area;  
 Tin On Solder Talls  
 Shell: Nickel Plating

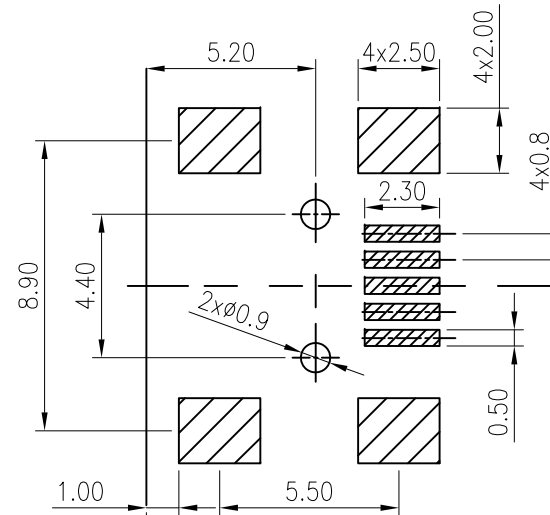

RECOMMENDED PCB LAYOUT



MARK

TOLERANCE

X.X ±0.30  
 X.XX ±0.20  
 X.XXX ±0.10  
 Angle ±2°

TITLE:

Mini USB 5P SMT 90°  
 全贴带柱0.3壳贴膜  
 平口黑色铜壳

UNIT:mm

SCALE:N/A

DRAWN:

353 2022.01.10

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

**KONNRA** 东莞市康瑞电子有限公司  
 DongGuan Konnra Electronics Co.,Ltd.

PART NO.:U05S0007R

REV.:A1

DRAWING NO.:U05S0007R-S