


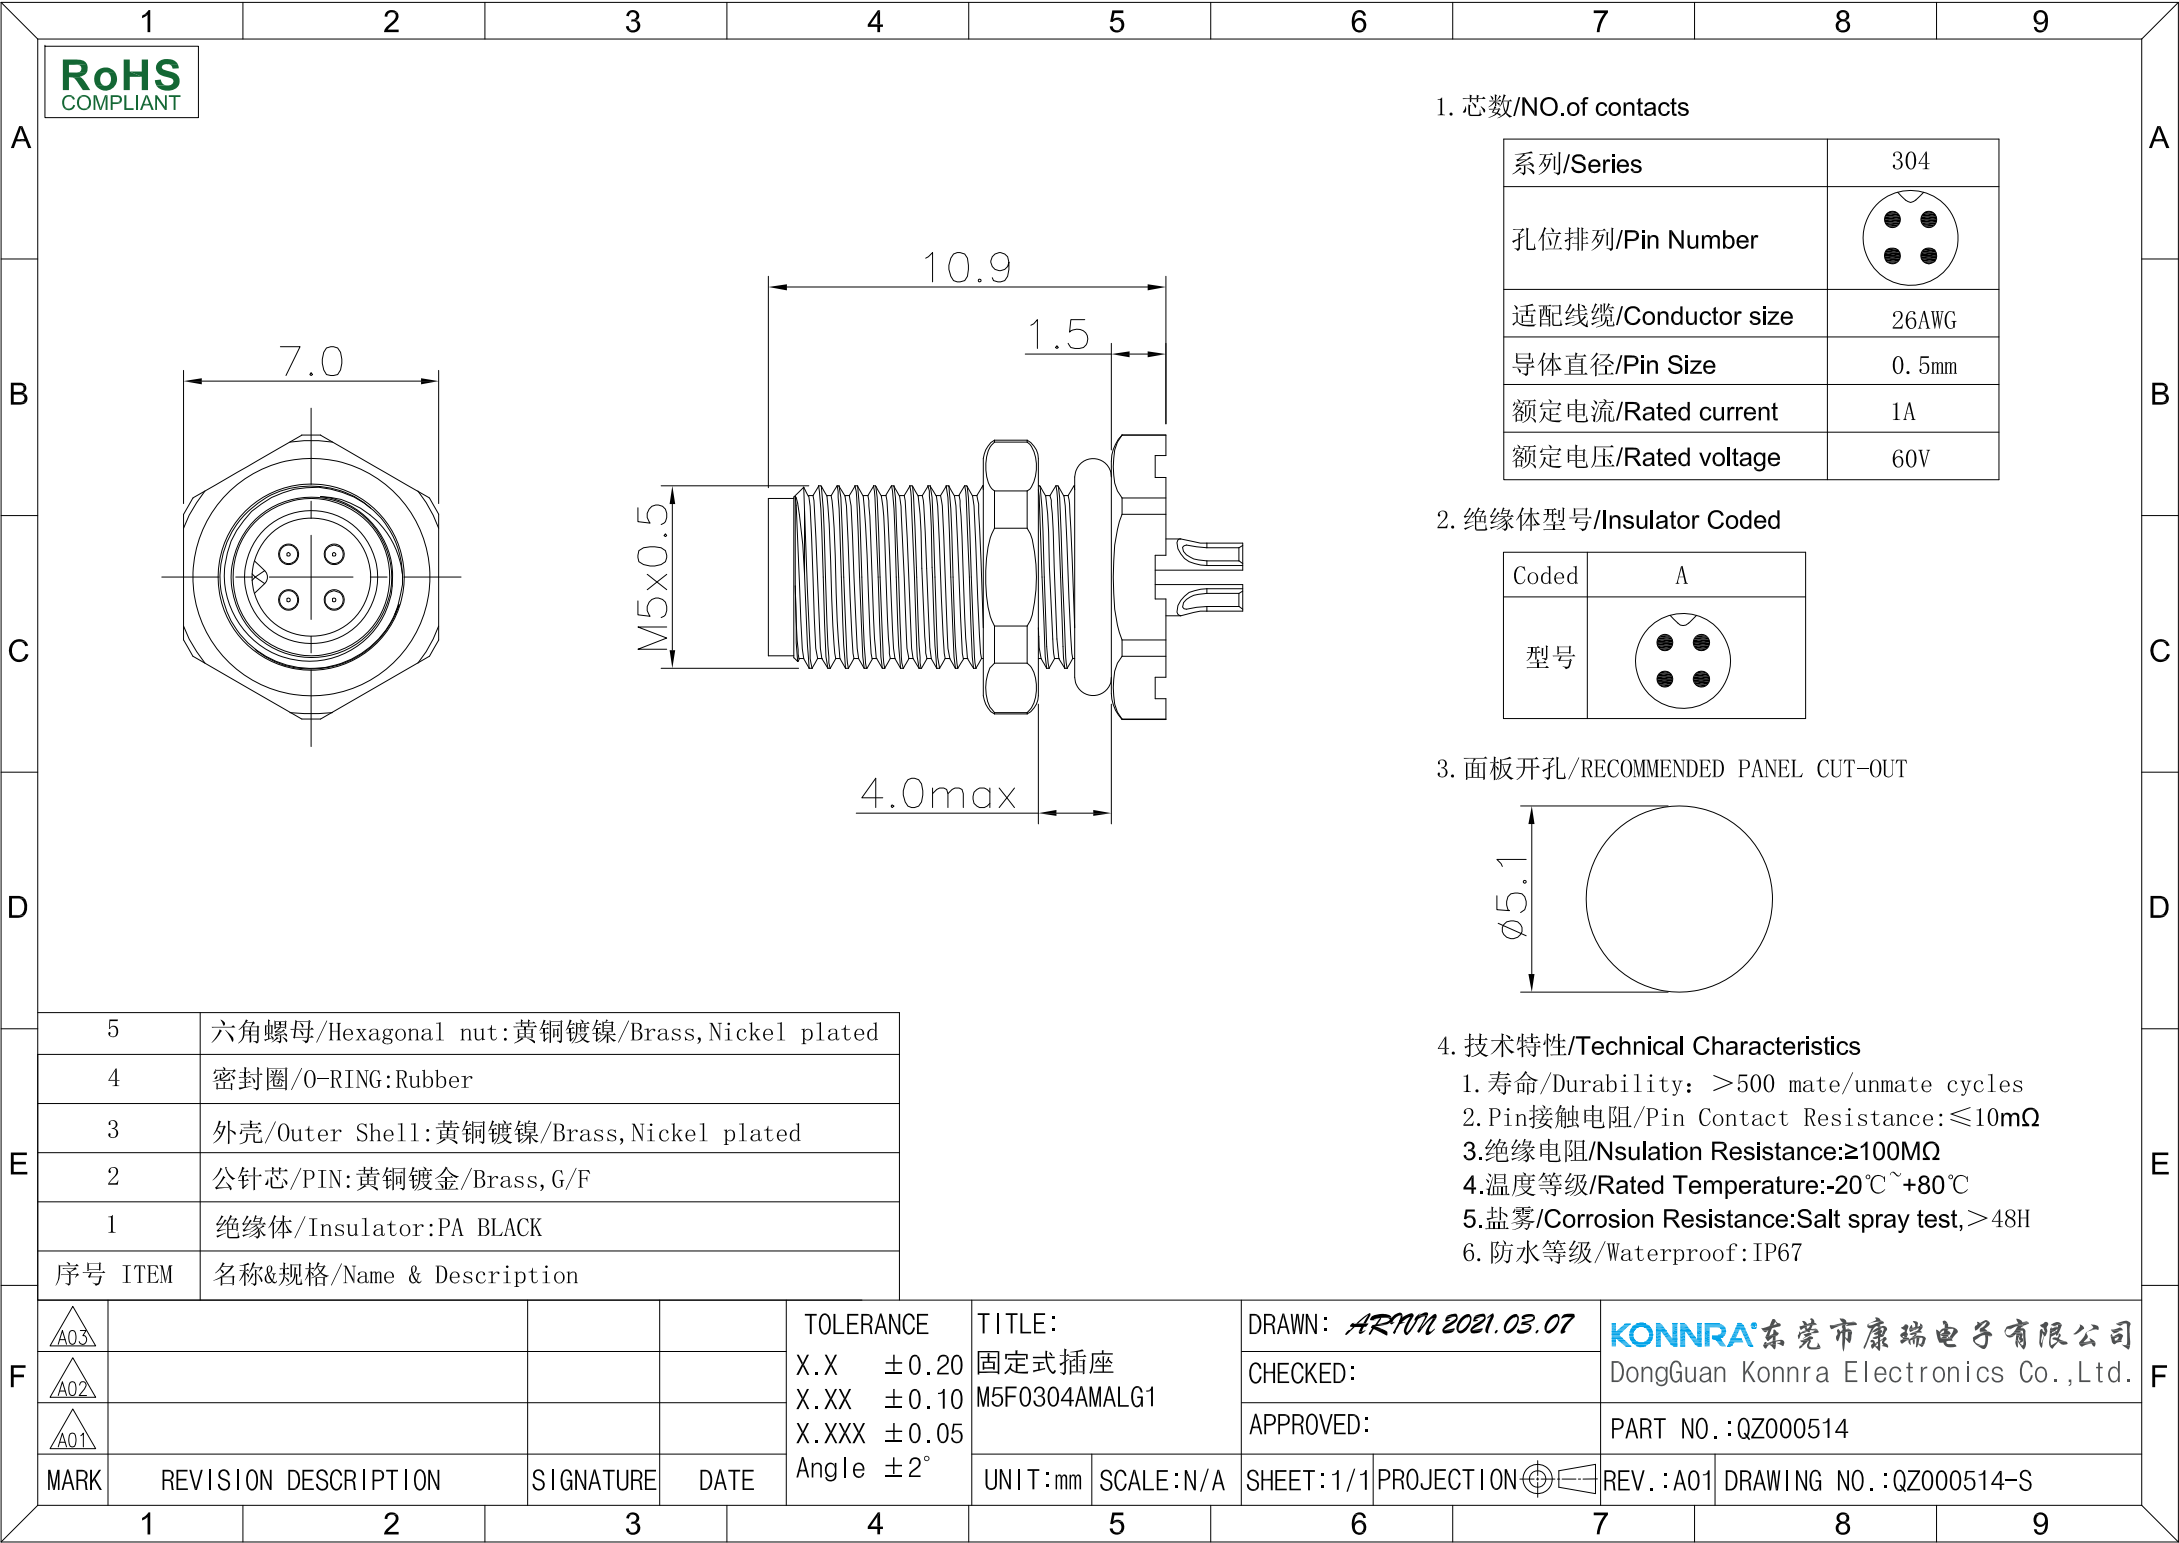

RoHS
COMPLIANT


1. 芯数/NO.of contacts

系列/Series	304
孔位排列/Pin Number	
适配线缆/Conductor size	26AWG
导体直径/Pin Size	0.5mm
额定电流/Rated current	1A
额定电压/Rated voltage	60V

2. 绝缘体型号/Insulator Coded

Coded	A
型号	

3. 面板开孔/RECOMMENDED PANEL CUT-OUT



4. 技术特性/Technical Characteristics

- 寿命/Durability: >500 mate/unmate cycles
- Pin接触电阻/Pin Contact Resistance: ≤10mΩ
- 绝缘电阻/Insulation Resistance: ≥100MΩ
- 温度等级/Rated Temperature: -20℃~+80℃
- 盐雾/Corrosion Resistance: Salt spray test, >48H
- 防水等级/Waterproof: IP67

5	六角螺母/Hexagonal nut:黄铜镀镍/Brass, Nickel plated
4	密封圈/O-RING:Rubber
3	外壳/Outer Shell:黄铜镀镍/Brass, Nickel plated
2	公针芯/PIN:黄铜镀金/Brass, G/F
1	绝缘体/Insulator:PA BLACK
序号 ITEM	名称&规格/Name & Description

A03				TOLERANCE X.X ±0.20 X.XX ±0.10 X.XXX ±0.05 Angle ±2°	TITLE: 固定式插座 M5F0304AMALG1		DRAWN: <i>ARM</i> 2021.03.07		KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
A02							CHECKED:					
A01									APPROVED:		PART NO.:QZ000514	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE				UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION 	REV.:A01	DRAWING NO.:QZ000514-S