

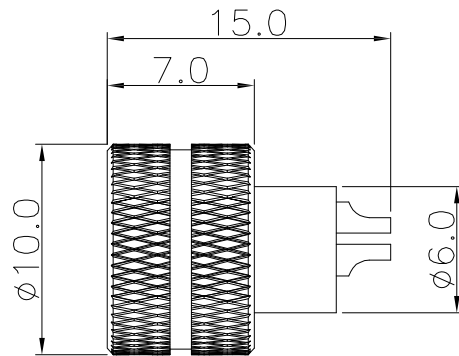
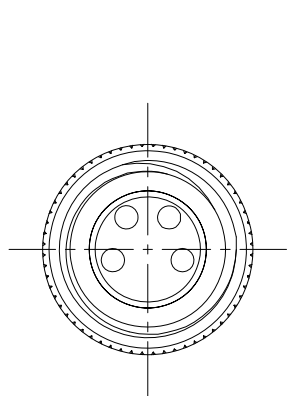


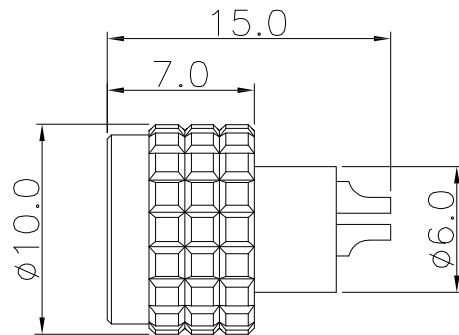

(M8A1)



(M8A3)

1. 芯数/NO.of contacts

系列/Series	304
孔位排列/Pin Number	
适配线缆/Conductor size	26AWG
导体直径/Pin Size	1.0mm
额定电流/Rated current	3A
额定电压/Rated voltage	30V

2. 绝缘体型号/Insulator Coded

Coded	A
型号	

3. 技术特性/Technical Characteristics

- 寿命/Durability: >1000 mate/unmate cycles
- Pin接触电阻/Pin Contact Resistance: $\leq 10\text{m}\Omega$
- 绝缘电阻/Insulation Resistance: $\geq 100\text{M}\Omega$
- 温度等级/Rated Temperature: $-25^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- 盐雾/Corrosion Resistance: Salt spray test, >48H
- 防水等级/Waterproof: IP67

4	母针芯/PIN:磷铜镀金/Phosphor copper, G/F
3	外壳/Outer Shell:黄铜镀镍/Brass, Nickel plated
2	密封圈/O-RING:Rubber
1	绝缘体/Insulator:PA BLACK
序号 ITEM	名称&规格/Name & Description

A03

A02

A01

MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X.X ± 0.20 X.XX ± 0.10 X.XXX ± 0.05 Angle $\pm 2^{\circ}$

TITLE:

浮动式插头

M8A1304AFYBG1

UNIT:mm

SCALE:N/A

DRAWN: ARMM 2021.03.10

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

REV.:A01

DRAWING NO.:QZ000515-S

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co.,Ltd.

PART NO.:QZ000515