


RoHS
COMPLIANT

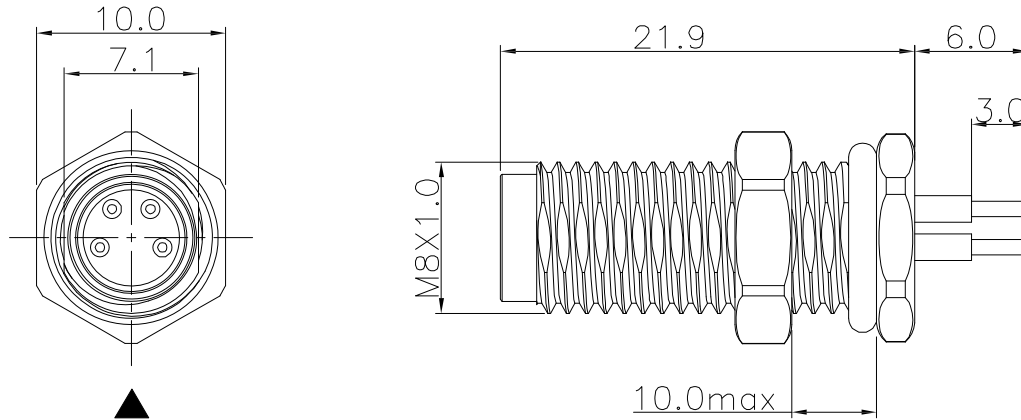

1. 芯数/NO.of contacts


系列/Series	304
Pin排列/Pin Assifnment PCB 孔位/PCB Layout(Front View)	
导体直径/Pin Size	1.0mm
额定电流/Rated current	3A
额定电压/Rated voltage	30V

" ▲ " Insulator key

2. 绝缘体型号/Insulator Coded

Coded	A
型号	

3. 面板开孔/RECOMMENDED PANEL CUT-OUT



4. 技术特性/Technical Characteristics

- 寿命/Durability: >1000 mate/unmate cycles
- Pin接触电阻/Pin Contact Resistance: ≤10mΩ
- 绝缘电阻/Insulation Resistance: ≥100MΩ
- 温度等级/Rated Temperature: -25℃~+80℃
- 盐雾/Corrosion Resistance: Salt spray test, >48H
- 防水等级/Waterproof: IP67

5 六角螺母/Hexagonal nut:黄铜镀镍/Brass, Nickel plated

4 公针芯/PIN: 黄铜镀金/Brass, G/F

3 外壳/Outer Shell:黄铜镀镍/Brass, Nickel plated

2 密封圈/O-RING:Rubber

1 绝缘体/Insulator:PA BLACK

序号 ITEM 名称&规格/Name & Description

A03

A02

A01

MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X.X ±0.20

X.XX ±0.10

X.XXX ±0.05

Angle ±2°

TITLE:

固定式插座

M8F0304AMDBG1

UNIT:mm

SCALE:N/A

DRAWN: *ARM 2021.03.15*

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co.,Ltd.

PART NO.: QZ000528

REV.: A01 DRAWING NO.: QZ000528-S