
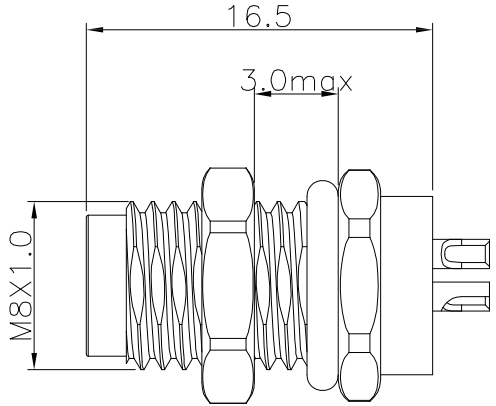


	1	2	3	4	5	6	7	8	9																																																	
A	RoHS COMPLIANT									1. 芯数/NO.of contacts<table><tr><td>系列/Series</td><td>304</td></tr><tr><td>孔位排列/Pin Number</td><td></td></tr><tr><td>适配线缆/Conductor size</td><td>24AWG</td></tr><tr><td>导体直径/Pin Size</td><td>1.0mm</td></tr><tr><td>额定电流/Rated current</td><td>3A</td></tr><tr><td>额定电压/Rated voltage</td><td>30V</td></tr></table>				系列/Series	304	孔位排列/Pin Number		适配线缆/Conductor size	24AWG	导体直径/Pin Size	1.0mm	额定电流/Rated current	3A	额定电压/Rated voltage	30V	A																																
系列/Series	304																																																									
孔位排列/Pin Number																																																										
适配线缆/Conductor size	24AWG																																																									
导体直径/Pin Size	1.0mm																																																									
额定电流/Rated current	3A																																																									
额定电压/Rated voltage	30V																																																									
B					2. 绝缘体型号/Insulator Coded<table><tr><td>Coded</td><td>A</td></tr><tr><td>型号</td><td></td></tr></table>					Coded	A	型号		B																																												
Coded	A																																																									
型号																																																										
C					3. 面板开孔/RECOMMENDED PANEL CUT-OUT					C																																																
D										D																																																
E	<table><tr><td>5</td><td>六角螺母/Hexagonal nut:黄铜镀镍/Brass,Nickel plated</td></tr><tr><td>4</td><td>公针芯/PIN: 黄铜镀金/Brass, G/F</td></tr><tr><td>3</td><td>外壳/Outer Shell:黄铜镀镍/Brass,Nickel plated</td></tr><tr><td>2</td><td>密封圈/O-RING:Rubber</td></tr><tr><td>1</td><td>绝缘体/Insulator:PA BLACK</td></tr><tr><td>序号 ITEM</td><td>名称&规格/Name & Description</td></tr></table>				5	六角螺母/Hexagonal nut:黄铜镀镍/Brass,Nickel plated	4	公针芯/PIN: 黄铜镀金/Brass, G/F	3	外壳/Outer Shell:黄铜镀镍/Brass,Nickel plated	2	密封圈/O-RING:Rubber	1	绝缘体/Insulator:PA BLACK	序号 ITEM	名称&规格/Name & Description	4. 技术特性/Technical Characteristics 1. 寿命/Durability: >1000 mate/unmate cycles 2. Pin接触电阻/Pin Contact Resistance:≤10mΩ 3.绝缘电阻/Insulation Resistance:≥100MΩ 4.温度等级/Rated Temperature:-25℃~+80℃ 5.盐雾/Corrosion Resistance:Salt spray test,>48H 6. 防水等级/Waterproof:IP67					E																																				
5	六角螺母/Hexagonal nut:黄铜镀镍/Brass,Nickel plated																																																									
4	公针芯/PIN: 黄铜镀金/Brass, G/F																																																									
3	外壳/Outer Shell:黄铜镀镍/Brass,Nickel plated																																																									
2	密封圈/O-RING:Rubber																																																									
1	绝缘体/Insulator:PA BLACK																																																									
序号 ITEM	名称&规格/Name & Description																																																									
F	<table><tr><td></td><td></td><td></td><td></td><td>TOLERANCE</td><td>TITLE:</td><td colspan="2">DRAWN: <i>ARM 2021.03.15</i></td><td colspan="2" rowspan="3">KONNRA东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.</td></tr><tr><td></td><td></td><td></td><td></td><td>X.X ±0.20</td><td>固定式插座</td><td colspan="2">CHECKED:</td></tr><tr><td></td><td></td><td></td><td></td><td>X.XX ±0.10</td><td>M8F6304AMABG1</td><td colspan="2">APPROVED:</td></tr><tr><td>MARK</td><td>REVISION</td><td>DESCRIPTION</td><td>SIGNATURE</td><td>DATE</td><td>X.XXX ±0.05</td><td>UNIT:mm</td><td>SCALE:N/A</td><td>SHEET:1/1</td><td>PROJECTION</td><td>PART NO.:QZ000530</td></tr><tr><td></td><td>1</td><td>2</td><td>3</td><td>4</td><td>Angle ±2°</td><td></td><td></td><td></td><td></td><td>DRAWING NO.:QZ000530-S</td></tr></table>								TOLERANCE	TITLE:	DRAWN: <i>ARM 2021.03.15</i>		KONNRA东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.						X.X ±0.20	固定式插座	CHECKED:						X.XX ±0.10	M8F6304AMABG1	APPROVED:		MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.05	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	PART NO.:QZ000530		1	2	3	4	Angle ±2°					DRAWING NO.:QZ000530-S						F
				TOLERANCE	TITLE:	DRAWN: <i>ARM 2021.03.15</i>		KONNRA东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.																																																		
				X.X ±0.20	固定式插座	CHECKED:																																																				
				X.XX ±0.10	M8F6304AMABG1	APPROVED:																																																				
MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.05	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION	PART NO.:QZ000530																																																
	1	2	3	4	Angle ±2°					DRAWING NO.:QZ000530-S																																																
	1	2	3	4	5	6	7	8	9																																																	

RoHS
COMPLIANT

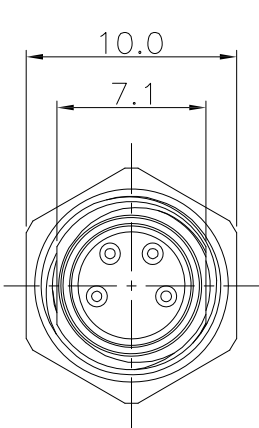


1. 芯数/NO.of contacts

系列/Series	304
孔位排列/Pin Number	
适配线缆/Conductor size	24AWG
导体直径/Pin Size	1.0mm
额定电流/Rated current	3A
额定电压/Rated voltage	30V

2. 绝缘体型号/Insulator Coded

Coded	A
型号	

3. 面板开孔/RECOMMENDED PANEL CUT-OUT



4. 技术特性/Technical Characteristics

1. 寿命/Durability: >1000 mate/unmate cycles
2. Pin接触电阻/Pin Contact Resistance:≤10mΩ
- 3.绝缘电阻/Insulation Resistance:≥100MΩ
- 4.温度等级/Rated Temperature:-25℃~+80℃
- 5.盐雾/Corrosion Resistance:Salt spray test,>48H
6. 防水等级/Waterproof:IP67

A03				TOLERANCE	TITLE:		DRAWN: <i>ARM 2021.03.15</i>		KONNRA东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.		
A02				X.X ±0.20	固定式插座		CHECKED:				
A01				X.XX ±0.10	M8F6304AMABG1		APPROVED:				
				X.XXX ±0.05					PART NO.:QZ000530		
MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	Angle ±2°	UNIT:mm	SCALE:N/A	SHEET:1/1	PROJECTION 	REV.:A01	DRAWING NO.:QZ000530-S