

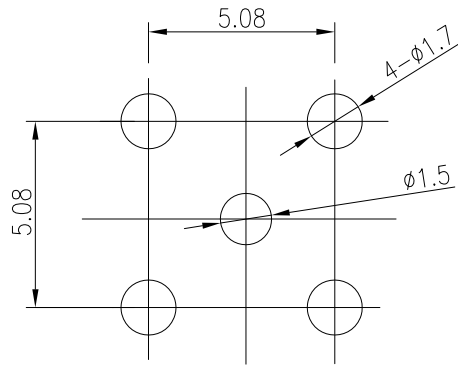


RoHS
COMPLIANT

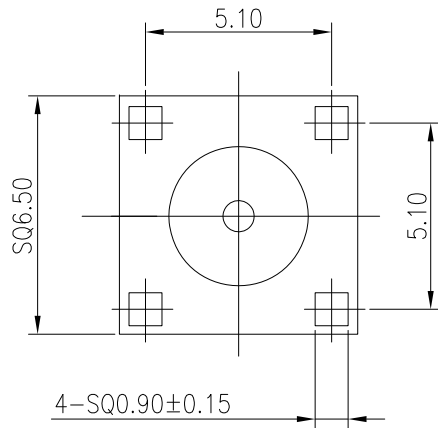

PCB Layout

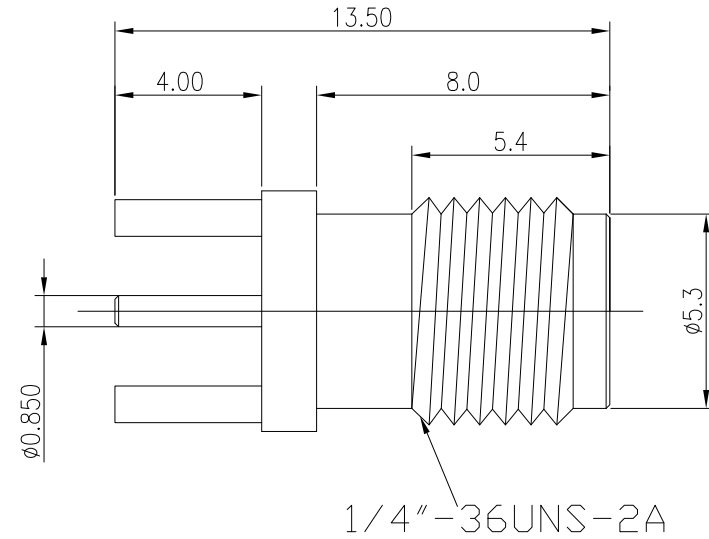

一. 电气特性:

1. 工作电压335V MAX(有效值)
2. 耐电压1000V rms
3. 绝缘电阻: ≥ 5000 M Ω
4. 绝缘阻抗: 50 OHM
5. 驻波比: 0-6GHZ 1.5 MAX

二. 工作温度:-55° C~+155° C

3	绝缘: 铁氟龙 白色
2	SMA母针: 黄铜 镀金
1	四角本体: 黄铜 镀金
序号 ITEM	名称&规格/Name & Description

A03				TOLERANCE	TITLE:	DRAWN: 2023.03.05	KONNRA 东莞市康瑞电子有限公司
A02				X.X ± 0.30	SMA058 SMA母头母针	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.
A01				X.XX ± 0.20	FPR PCB/SQ6.5*13.5	APPROVED:	PART NO.:QA000348
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ± 0.10	UNIT:mm	SHEET:1/1	REV.:A01
				Angle $\pm 2^\circ$	SCALE:N/A	PROJECTION	DRAWING NO.:QA000348-S