
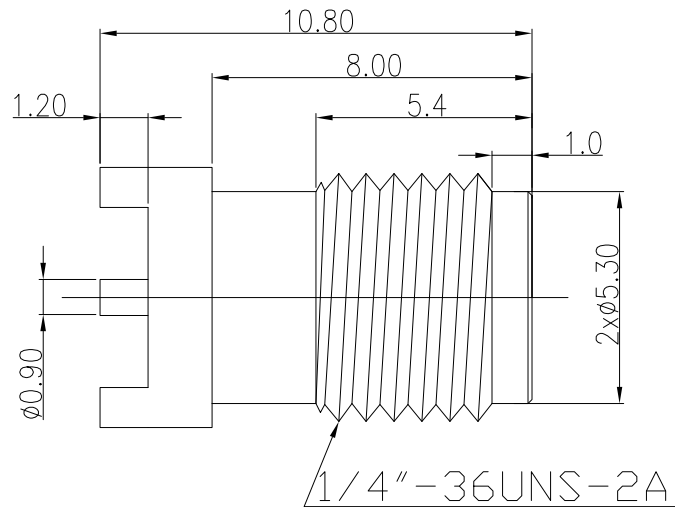


RoHS
COMPLIANT

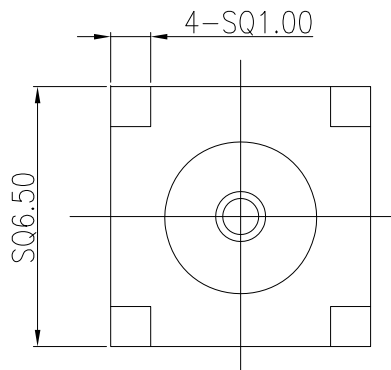

一. 电气特性:

1. 工作电压AC 250V
 2. 耐电压100V 50HZ RMS
 3. 绝缘电阻:1000M OHM MIN
 4. 绝缘阻抗:50 OHM
 5. 驻波比:0-6GHz 1.5MAX
- 二. 工作温度:-55° C~+165° C

3	绝缘: 铁氟龙 白色
2	SMA母针: 黄铜 镀金
1	四角本体: 黄铜 镀金
序号 ITEM	名称&规格/Name & Description

A03				TOLERANCE	TITLE:	DRAWN: 2023.04.22	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd. PART NO.:QA000353		
A02				X.X ±0.30	SMA420 SMA JACK母	CHECKED:			
A01				X.XX ±0.20	针 FOR	APPROVED:			
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	PCB/SQ6.5*10.8		REV.:A01	DRAWING NO.:QA000353-S	
1				Angle ±2°	UNIT:mm SCALE:N/A	SHEET:1/1 PROJECTION			