




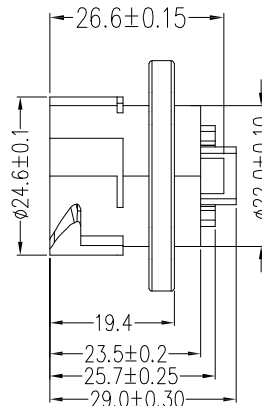
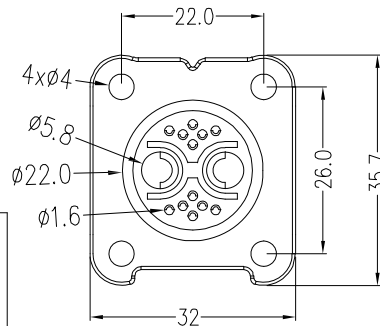


Note:
1. Female Plastic Socket
2. Copper tube

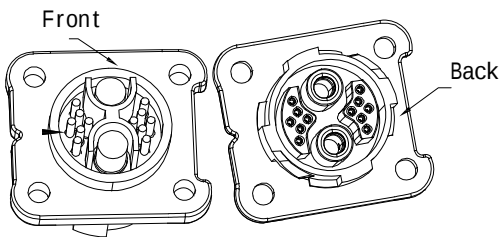

SPECIFICATIONS

1. Current rating: Power Terminals 40A, Signal Terminals 10A
2. Voltage rating: 300V AC, DC
3. Temperature range: -40C ~ +105C
4. Insulation resistance: 100MΩ Min
5. Withstanding voltage: 2000V AC/minute
6. Contact resistance: 10mΩ Max.
7. Mating cycles >500 cycles

2	Female pin	Brass H59	Gold plating 1μ	1+2+5
1	Female Plastic Socket	PA66	Black	1

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
M30-2_12
Female Socket

DRAWN: ACX 2024.07.12

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co., Ltd.

PART NO.: QZ000653

△A03
△A02
△A01

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT:mm SCALE:N/A

SHEET:1/1

PROJECTION

REV.:A01

DRAWING NO.: QZ000653S