

RoHS COMPLIANT

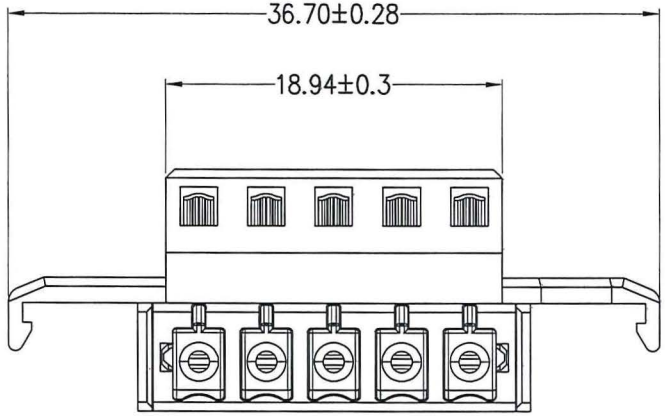


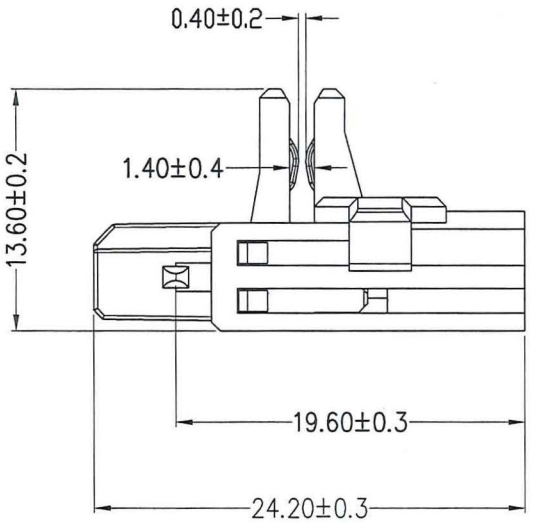


SPECIFICATIONS
1. Current rating: 8.0A AC, DC
2. Voltage rating:250V AC,DC
3. Temperature range: -40°C ~ +70°C
4. Insulation resistance: 500MΩ/ min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ/ max.

Material:
Insulator: Plastic(PA6)
Contact: Phosphorus

Plating: Nickel plating and gold plating in the contact area

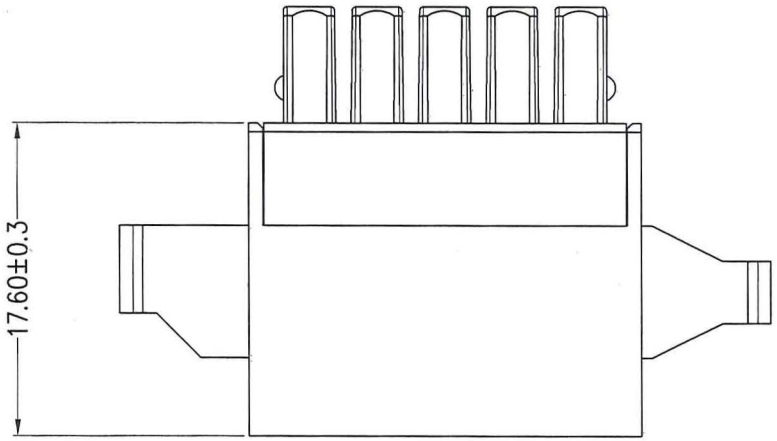

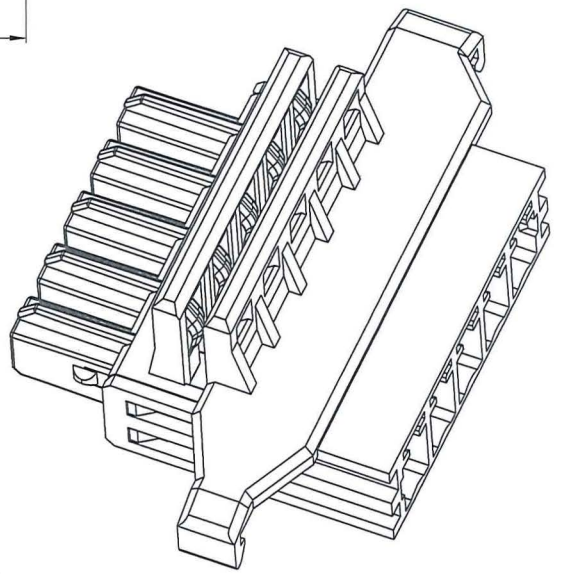

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A01	NEW DWG	Qiqing.Li	2026.08.19

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE: 3.81 Pitch 5PIN Socket

UNIT:mm | SCALE:1:1

DRAWN: Qiqing.Li 2026.08.19
CHECKED:
APPROVED:

SHEET:1/1 | PROJECTION | REV.:A01

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:H381001058001A
DRAWING NO.:3810WFRD101-A-S