
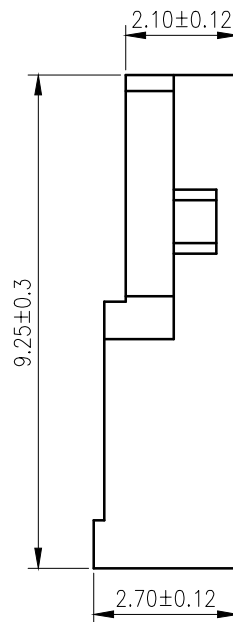
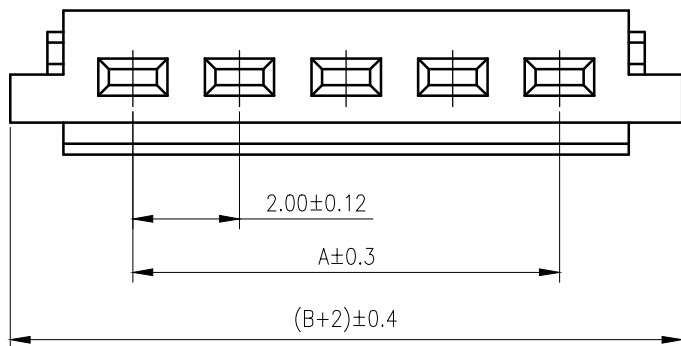


RoHS
COMPLIANT

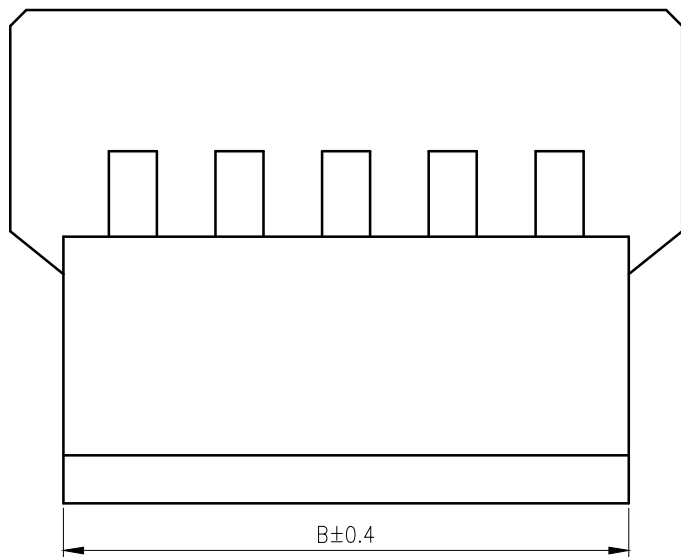

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Material: PA66 UL 94V-0
Suitable KR2007 series terminal
Mate with KR2007 series housing
Ordering Code:

H2007M *** 01 01C

No.of Circuits
102:2,116:16
Insulator Material
01:PA66 White

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	2.00	4.60	10	18.00	20.60
3	4.00	6.60	11	20.00	22.60
4	6.00	8.60	12	22.00	24.60
5	8.00	10.60	13	24.00	26.60
6	10.00	12.60	14	26.00	28.60
7	12.00	14.60	15	28.00	30.60
8	14.00	16.60	16	30.00	32.60
9	16.00	18.60			



Uniformly arrange the drawings

ZSZ

2021.09.24



Change the part number and
frame format

LJT

2020.04.29

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX2.0 Air docking
Male Housing

DRAWN: ZSZ 2021.09.24

CHECKED:

APPROVED:

UNIT:mm

SCALE:N/A

SHEET:1/1

PROJECTION




KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:H2007M***0101C

REV.:A3

DRAWING NO.:2007HM101-C-S

RoHS
COMPLIANT

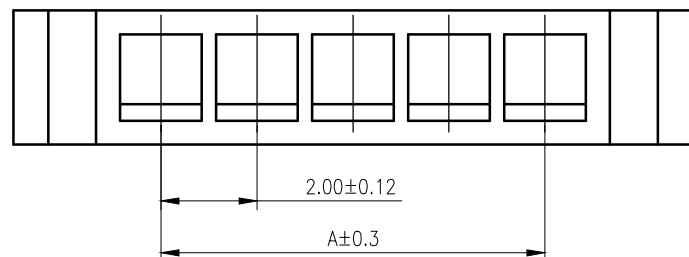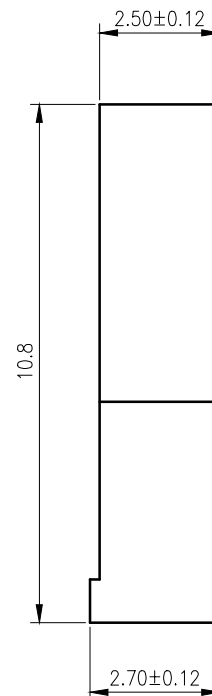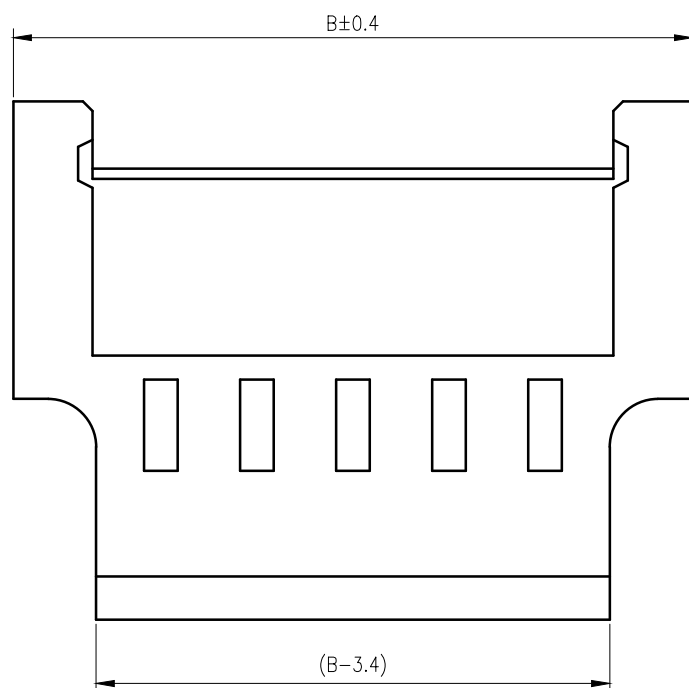

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000M Ω Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20m Ω Max.

Material: PA66 UL 94V-0

Suitable KR2007 series terminal

Mate with KR2007 series housing

Ordering Code:

H2007F *** 01 01C

No.of Circuits
102:2,116:16

Insulator Material
01:PA66 White 94V-0

Circuits	Dimension		Circuits	Dimension	
	A	B		A	B
2	2.00	8.00	10	18.00	24.00
3	4.00	10.00	11	20.00	26.00
4	6.00	12.00	12	22.00	28.00
5	8.00	14.00	13	24.00	30.00
6	10.00	16.00	14	26.00	32.00
7	12.00	18.00	15	28.00	34.00
8	14.00	20.00	16	30.00	36.00
9	16.00	22.00			



Uniformly arrange the drawings

ZSZ

2021.09.24



Change the part number and
frame format

LJT

2020.04.29

TOLERANCE
X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
Angle $\pm 2^\circ$

TITLE:
MX2.0 Air docking
Female Housing

DRAWN: *ZSZ* 2021.09.24

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: H2007F***0101C

MARK

1

2

3

4

5

6

7

8

9

UNIT:mm

SCALE:N/A



SHEET:1/1

PROJECTION


REV.:A3

DRAWING NO.:2007HF101-C-S


RoHS
COMPLIANT

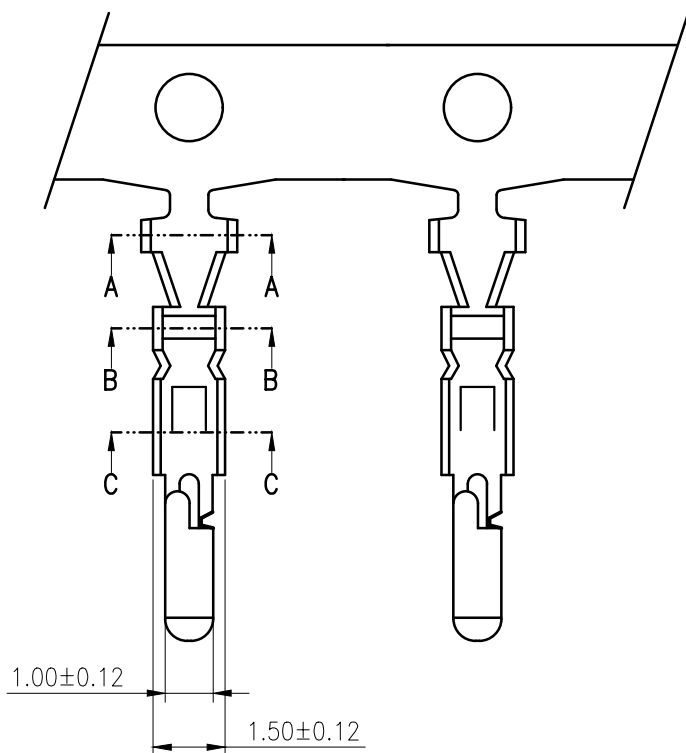

A-A



B-B



C-C

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#24~#28

Insulation O.D. : 1.40mm MAX

Material: Phosphor Bronze

Finish: Tin-Plated

Suitable KR2007 series housing

Q'ty/reel: 13,000PCS

A3

Uniformly arrange the drawings

ZSZ

2021.09.24

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX2.0 Air docking
Male Terminal

DRAWN: ZSZ 2021.09.24

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: T2007MPT0101C

MARK

1

2

3

4

5





6

7

8

9

RoHS
COMPLIANT

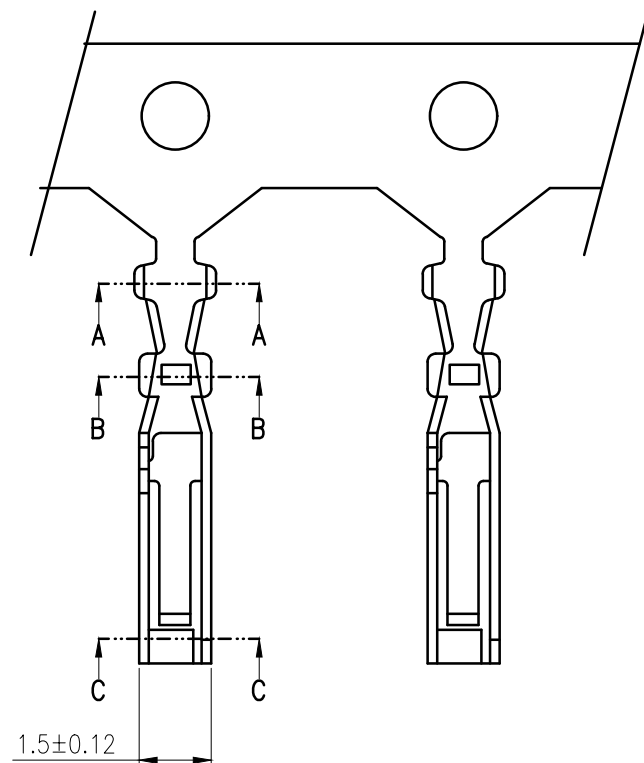

SPECIFICATIONS

1. Current rating: 2A AC, DC
2. Voltage rating: 125V AC,DC
3. Temperature range: -40°C ~ +105°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 500V AC/ minute.
6. Contact resistance: 20mΩ Max.

Applicable Wires:

AWG#24~#28

Insulation O.D. : 1.40mm MAX

Material: Phosphor Bronze

Finish: Tin-Plated

Suitable KR2007 series housing

Q'ty/reel: 13,000PCS

A3

Uniformly arrange the drawings

ZSZ

2021.09.24

A2

Change the part number and
frame format

LJT

2020.04.29

TOLERANCE
X.X ±0.30
X.XX ±0.20
X.XXX ±0.10
Angle ±2°

TITLE:
MX2.0 Air docking
Female Terminal

DRAWN: ZSZ 2021.09.24

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.: T2007FPT0101C

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

UNIT:mm

SCALE:1/1

SHEET:1/1

PROJECTION

REV.:A3

DRAWING NO.:2007TF101-C-S