
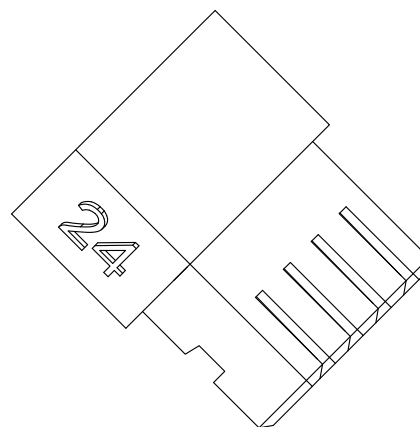
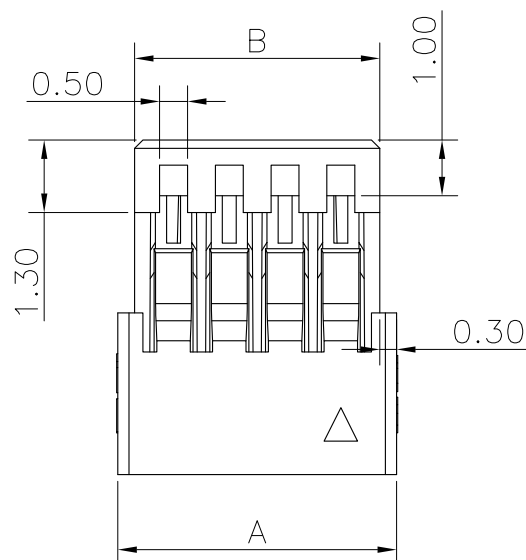
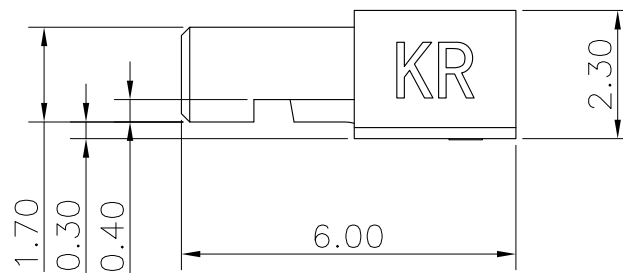


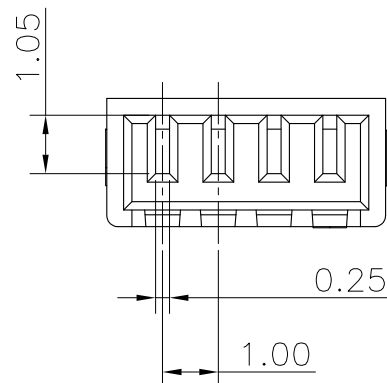

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 100V AC, DC $\triangle A06$
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100M Ω Min.
- Withstanding voltage: 500V AC/ minute.
- Contact resistance: 20m Ω Max.

Material:

Insulator: PA66 UL 94V-0

Circuits: 2~20

Suitable: KR1000 series Terminal

Ordering code:

H100501**0102A

102=2P
103=3P

16P	17.00	16.40
15P	16.00	15.40
14P	15.00	14.40
13P	14.00	13.40
12P	13.00	12.40
11P	12.00	11.40
10P	11.00	10.40
9P	10.00	9.40
8P	9.00	8.40
7P	8.00	7.40
6P	7.00	6.40
5P	6.00	5.40
4P	5.00	4.40
3P	4.00	3.40
2P	3.00	2.40
Circuits	A	B

Dimensions

$\triangle A06$	Revise the rated voltage value	ZSZ	2026.03.02	TOLERANCE	TITLE: SHU1.0 No buckle Housing UNIT:mm SCALE:1/1	DRAWN: ZSZ 2026.03.02		KONNRA 东莞市康瑞电子有限公司	
$\triangle A05$	Add 11~16pin specification	ZSZ	2024.03.20	X.X ± 0.30		CHECKED:		DongGuan Konnra Electronics Co.,Ltd.	
$\triangle A04$	Add 10pin specification	ZSZ	2021.11.04	X.XX ± 0.20		APPROVED:		PART NO.:H100501**0102A	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ± 0.10 Angle $\pm 2^\circ$		SHEET:1/1	PROJECTION	REV.:A06	DRAWING NO.:1005H102-A-S