
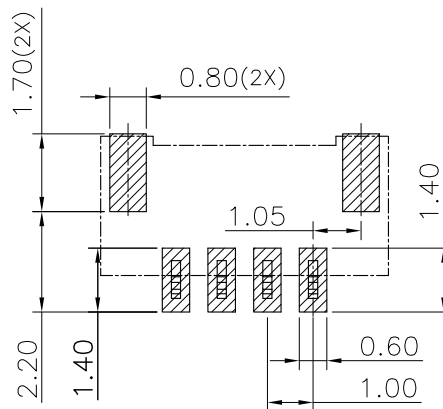
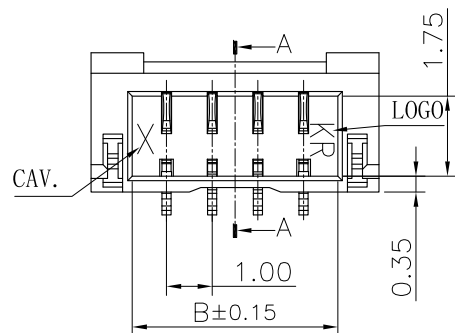
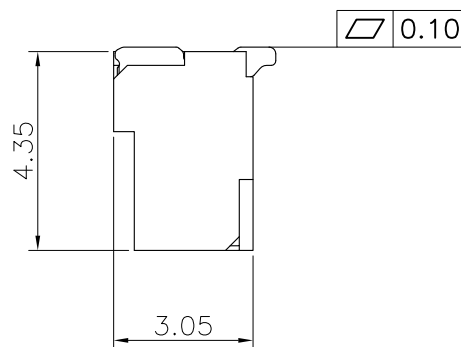


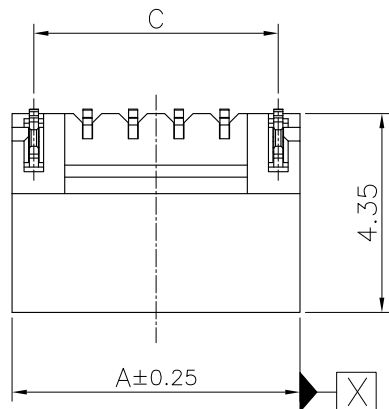

Recommended P.C.B. Layout
Total tolerance: ±0.05mm

◆ SPECIFICATIONS

Current rating: 1A AC, DC

Voltage rating: 100V AC, DC

Temperature range: -40°C ~ +105°C

Insulation resistance: 100MΩ Min.

Withstanding voltage: 500V AC/ minute.

Contact resistance: 20mΩ Max.

Material:

Insulator: PA9T UL 94V-0

Contact: Copper alloy

Fitting Nail: Copper alloy

Plating: Matte Tin plated over Nickel

Circuits: 2~20

Mates With KR1005 Series Single Row Housing

Ordering code: C1005VS1**11M0102*A

102=2P
103=3P

R:Reel
P:Bag

11P	13.30	11.50	12.35				
10P	12.30	10.50	11.35	20P	22.30	20.50	21.35
9P	11.30	9.50	10.35	19P	21.30	19.50	20.35
8P	10.30	8.50	9.35	18P	20.30	18.50	19.35
7P	9.30	7.50	8.35	17P	19.30	17.50	18.35
6P	8.30	6.50	7.35	16P	18.30	16.50	17.35
5P	7.30	5.50	6.35	15P	17.30	15.50	16.35
4P	6.30	4.50	5.35	14P	16.30	14.50	15.35
3P	5.30	3.50	4.35	13P	15.30	13.50	14.35
2P	4.30	2.50	3.35	12P	14.30	12.50	13.35
PIN	A	B	C	PIN	A	B	C

Dimensions

Dimensions



MARK

1

2

3

4

5

6

7

8

9

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.15

Angle ±2°

TITLE:

SHU1.0 Have Buckle

SMT 180° WF B TYPE

UNIT:mm

SCALE:1/1

DRAWN:

Shen 2021.12.30

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C1005VS1**11M0102*A

REV.:A1

DRAWING NO.:1005WFS02-A-S