

RoHS
COMPLIANT

◆ SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:Housing:Nylon 66 UL94-V0

Suitable:KR1250 series Terminal





Mates with:KR1250W series Wafer And

KR1251 Housing


Q'ty:1,000PCS

PART NO.:H125001**0101B

PIN NO. 102=02P 103=03P... 00:HF 01:Conventional products

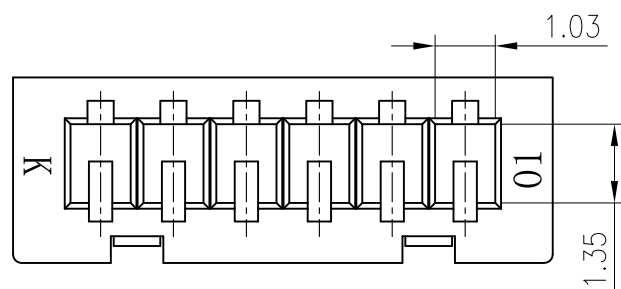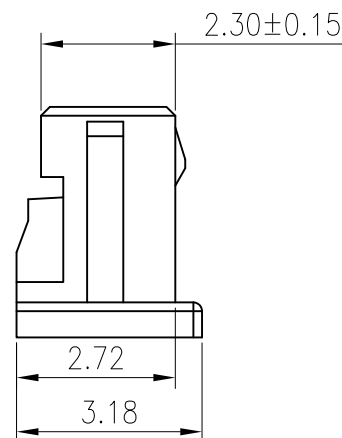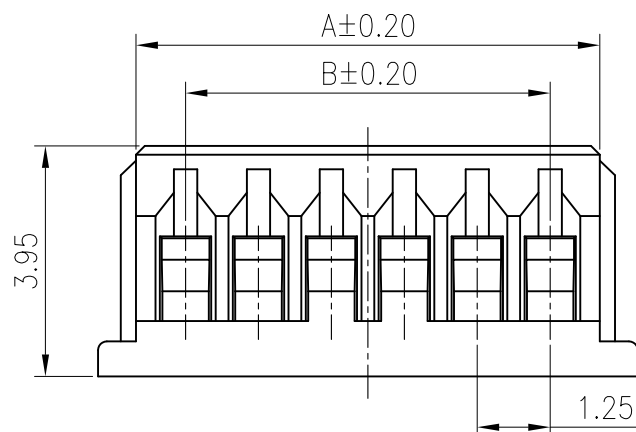

2PIN



3PIN

PIN NO.	A	B
02P	2.95	1.25
03P	4.20	2.50
04P	5.45	3.75
05P	6.70	5.00
06P	7.95	6.25
07P	9.20	7.50
08P	10.45	8.75
09P	11.70	10.00
10P	12.95	11.25
11P	14.20	12.50
12P	15.45	13.75
13P	16.70	15.00
14P	17.95	16.25
15P	19.20	17.50
16P	20.45	18.75

				TOLERANCE X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±2°	TITLE: MX1.25 Housing DDJ		DRAWN: Shen 2021.08.30		KONNRA 东莞市康瑞电子有限公司	
	Uniformly arrange the drawings	Shen	2021.08.30				CHECKED:		DongGuan Konnra Electronics Co.,Ltd.	
	Change the part number and frame format	TLX	2020.04.08				APPROVED:		PART NO.:H125001**010*B	
MARK	REVISION DESCRIPTION	SIGNATURE	DATE		UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION 	REV.:A3	DRAWING NO.:1250H104-B-S