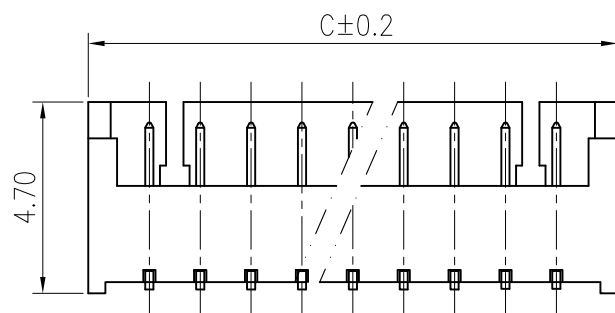
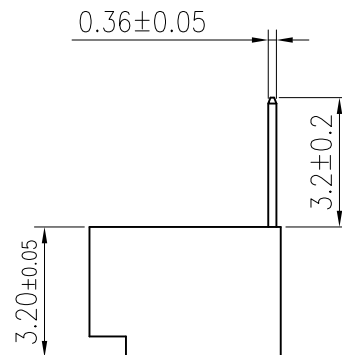
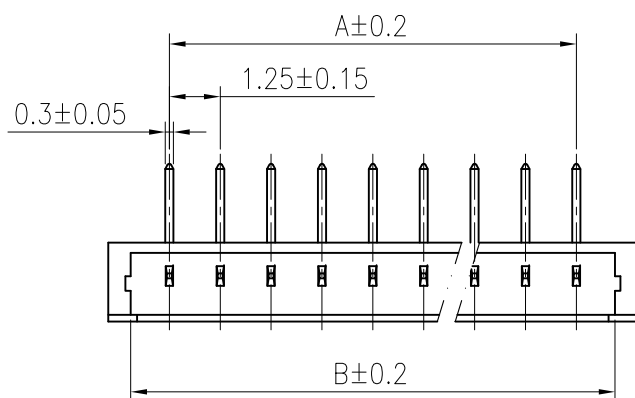


Recommended P.C.Board Layout
Total Tolerance:±0.05mm

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PA46/PA9T/LCP UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

Circuits: 2~16

Suitable: KR1250 series Housing

Ordering Code: C1250RD1**07T0102PA

02: 2P

16: 16P

P: Bag

11: PA9T Natural

13: LCP Natural

07: PA46 Natural

T01: Bright Tin

Cicuits	A	B	C	Cicuits	A	B	C
2	1.25	3.15	4.25	10	11.25	13.15	14.25
3	2.50	4.40	5.50	11	12.50	14.40	15.50
4	3.75	5.65	6.75	12	13.75	15.65	16.75
5	5.00	6.90	8.00	13	15.00	16.90	18.00
6	6.25	8.15	9.25	14	16.25	18.15	19.25
7	7.50	9.40	10.50	15	17.50	19.40	20.50
8	8.75	10.65	11.75	16	18.75	20.65	21.75
9	10.00	11.90	13.00				



Uniformly arrange the drawings

Shen

2021.8.30

Change the part number and
frame format

Ru yi

2020.3.10

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±2°

TITLE:

MX 1.25 DIP 90° Wafer
Lengthen

UNIT:mm

SCALE:1/1

DRAWN: Shen 2021.08.30

CHECKED:

APPROVED:

SHEET:1/1

PROJECTION

KONNRA 东莞市康瑞电子有限公司
DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C1250RD1****T0102PA

REV.:A3

DRAWING NO.:1250WHD102-A-S