
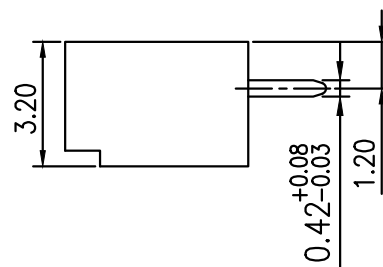


RoHS
COMPLIANT

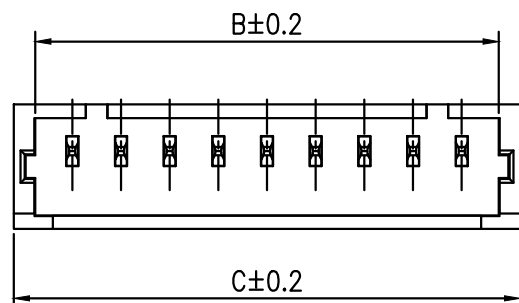

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Material:

Insulator: PA46/PA9T/LCP UL 94V-0

Contact: Brass

Plating: Tin plated over Nickel

Circuits: 2~16

Suitable: KR1250 series Housing

Ordering Code:

C1250VD1****T010*PA

102: 2P

116: 16P



07:PA46 ecru

11:PA9T ecru

13:LCP ecru

P:bags

00:Halogen free
01:Conventional
products

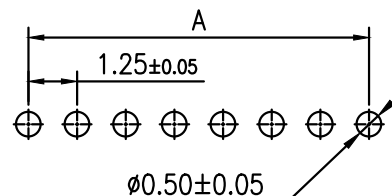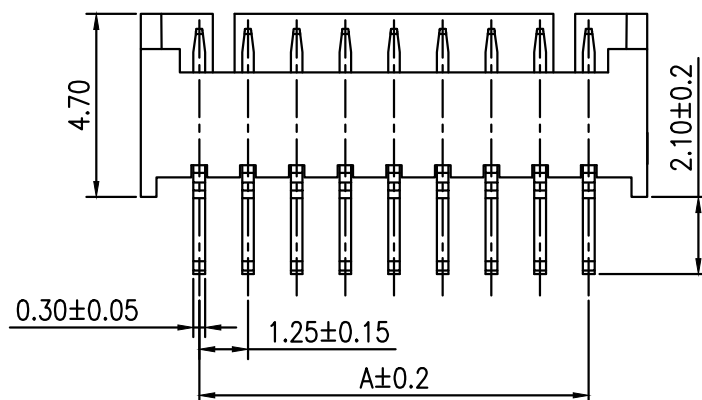

Recommended P.C.Board Layout

Cicuits	A	B	C	Cicuits	A	B	C
2	1.25	3.15	4.25	10	11.25	13.15	14.25
3	2.50	4.40	5.50	11	12.50	14.40	15.50
4	3.75	5.65	6.75	12	13.75	15.65	16.75
5	5.00	6.90	8.00	13	15.00	16.90	18.00
6	6.25	8.15	9.25	14	16.25	18.15	19.25
7	7.50	9.40	10.50	15	17.50	19.40	20.50
8	8.75	10.65	11.75	16	18.75	20.65	21.75
9	10.00	11.90	13.00				

MARK	REVISION	DESCRIPTION	SIGNATURE	DATE	TOLERANCE	TITLE	UNIT:mm	SCALE:1/1	SHEET:1/1	PROJECTION	REV.:A5	DRAWING NO.:1250WVD102-A-S
A5		Uniformly arrange the drawings	Shen	2021.08.30	X.X ±0.30	MX1.25 DIP 180°WF						
A4		ADD Phosphor bronze Specification	TLX	2020.03.20	X.XX ±0.20							
					X.XXX ±0.10							
					Angle ±3°							

DRAWN: Shen 2021.08.30

CHECKED:

APPROVED:

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co.,Ltd.

PART NO.:C1250VD1****T0101PA