
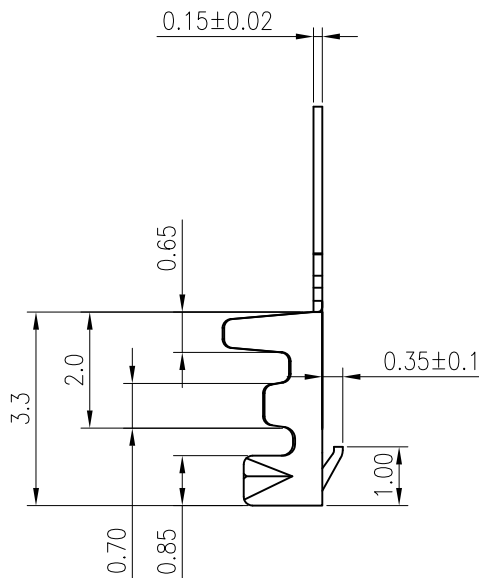


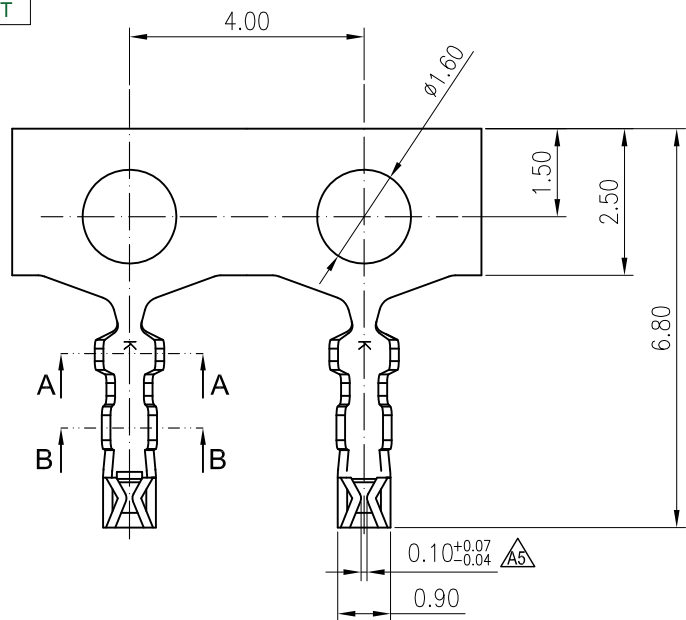

◆SPECIFICATIONS

- Current rating: 1A AC, DC
- Voltage rating: 125V AC,DC
- Temperature range: -40°C ~ +105°C
- Insulation resistance: 100MΩ Min.
- Withstanding voltage: 250V AC/ minute.
- Contact resistance: 20mΩ Max.

Terminal:

Material: Phosphor Bronze

Finish: Tin Plated over Nickel

Applicable wires:

AWG #28~#32

Insulation O.D.: 1.0mm Max.

Suitable:KR1250 series Housing

Qty/reel:15,000PCS

PART NO. :

T1250FP***01A

S00:Material


T01:Bright Tin

G01:Au 0.8u"


G02:Au 1u"

G03:Au 2u"


G05:Au 10u"



SECTION A-A



SECTION B-B



Uniformly arrange the drawings

Shen

2021.08.30



Add The Gap Size

ZZN

2021.04.07

MARK

REVISION DESCRIPTION

SIGNATURE

DATE

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±2°

TITLE:

MX1.25 Terminal

DRAWN: Shen 2021.08.30

CHECKED:

APPROVED:

UNIT:mm

SCALE:1:1

SHEET:1/1

PROJECTION

REV.:A6

DRAWING NO.:1250T101-A-S

KONNRA 东莞市康瑞电子有限公司

DongGuan Konnra Electronics Co.,Ltd.

PART NO.:T1250FP***01A