RoHS COMPLIANT

SPECIFICATIONS


1. Current rating: 3A
2. Voltage rating:32V AC
3. Temperature range: -40°C ~ +125°C
4. Insulation resistance: 1000MΩ Min.
5. Withstanding voltage: 1000V AC 1 Minute.
8. Contact resistance: 10mΩ Max.


Material:


Insulator: Thermoplastic


Contact: Copper Alloy


Plating: Bright Tin Plated Over Nickel

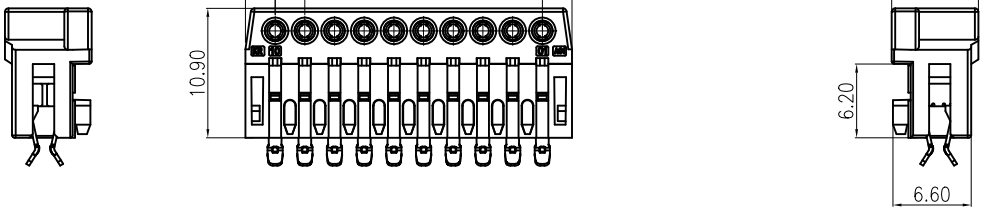



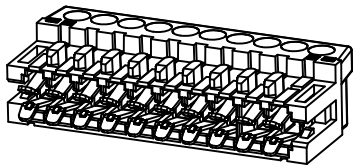



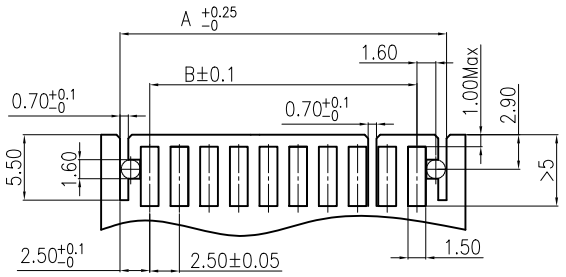

PCB Layout (Thickness:1.55±0.1mm）

Circuits	Dimensions	
	A	B
2P	7.50	2.50
3P	10.00	5.00
4P	12.50	7.50
5P	15.00	10.00
6P	17.50	12.50
7P	20.00	15.00
8P	22.50	17.50
9P	25.00	20.00
10P	27.50	22.50

MARK	REVISION DESCRIPTION	SIGNATURE	DATE
A01	NEW REVISION ISSU	Zhang pengfei	2026.03.25

TOLERANCE

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±2°

TITLE: 一体式RAST 2.5 XP

UNIT: mm | SCALE: 1:1

DRAWN:

CHECKED:

APPROVED:

SHEET:1OF1 | PROJECTION

KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.

PART NO.: C2525F01**61T0101TA

REV.: A01

DRAWING NO.: 2525FR101-A-S