


RoHS
COMPLIANT

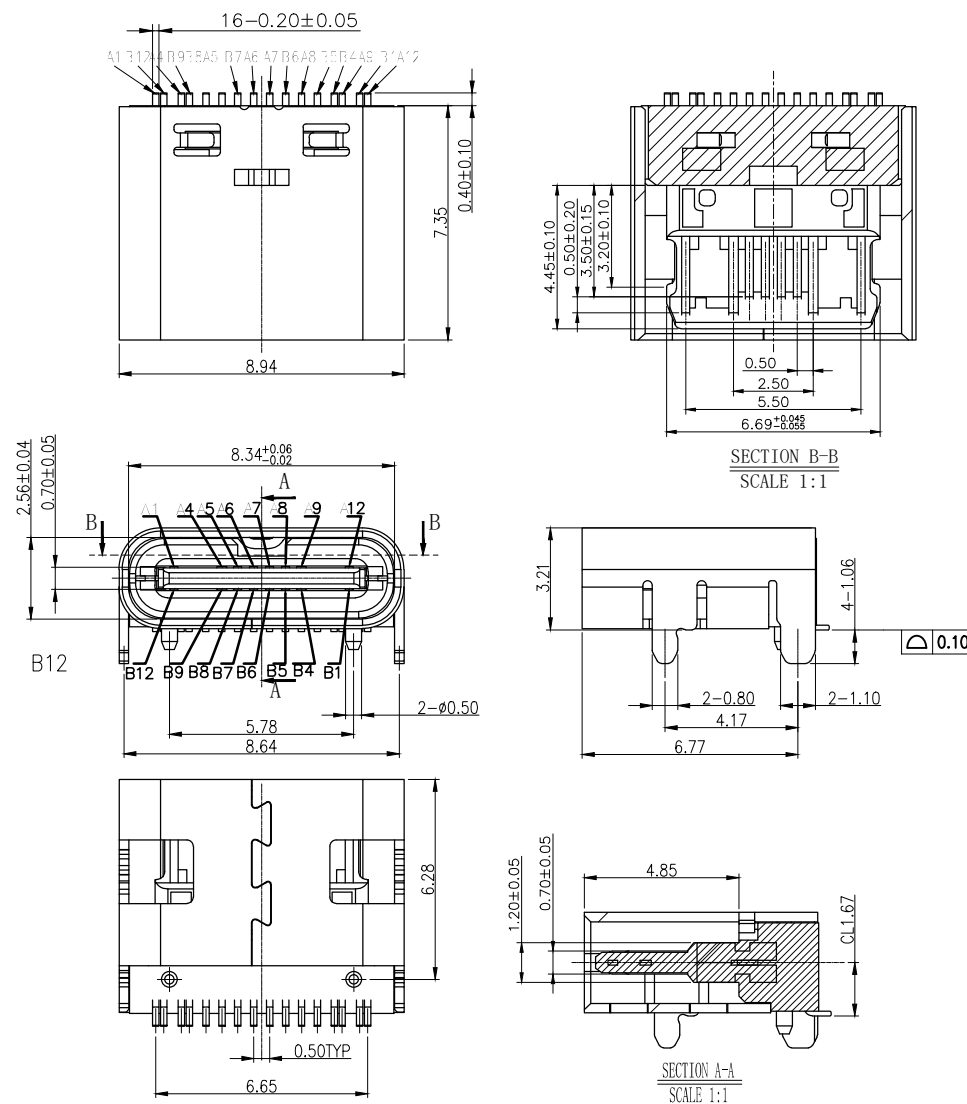


NOTE:



- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - MID PLATE: STAINLESS STEEL
- PLATING SPECIFICATION:
 - CONTACTS:
 - Ni UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT. (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - GOLD FLASH PLATING ON SOLDER AREA
 - FRONT SHELL:
 - Ni UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 0.5~2.0kgf.
 - REMOVAL FORCE: 0.8kgf~2.0kgf.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5A
VOLTAGE RATING: 20V
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -30°C~+80°C.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

F	A4				TOLERANCE	TITLE:	DRAWN: LCC 2024.05.30	KONNRA 东莞市康瑞电子有限公司		
	A3				X.X ±0.30	Type-C 16PIN 母座	CHECKED:	DongGuan Konnra Electronics Co.,Ltd.		
	A2				X.XX ±0.20	L=7.35 CH=1.67	APPROVED:	PART NO.: U04S0016R		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	X.XXX ±0.10	Angle ±2°	SHEET: 1/2	PROJECTION	REV.: A01	DRAWING NO.: U04S0016R-S
	1	2	3	4	5	6	7	8	9	

RoHS
COMPLIANT

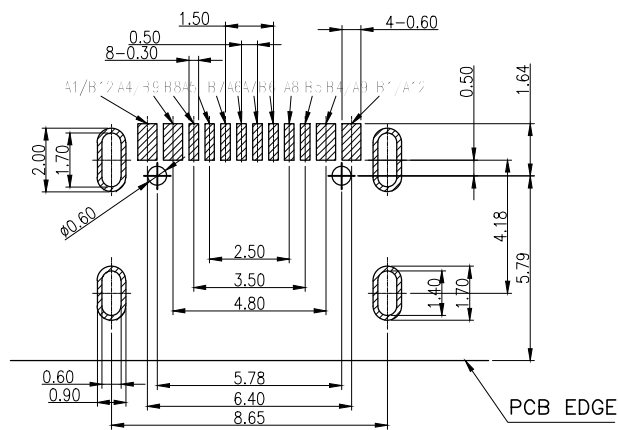

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

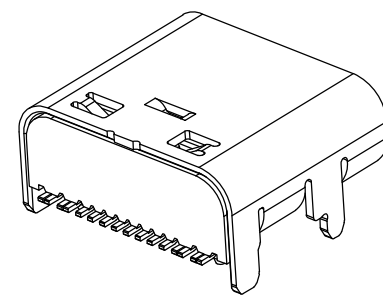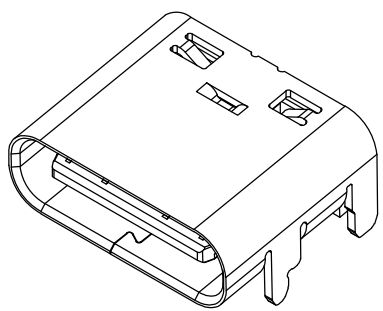

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

F					TOLERANCE	TITLE: Type-C 16PIN 母座 L=7.35 CH=1.67	DRAWN: <i>LCC 2024.05.30</i>	KONNRA 东莞市康瑞电子有限公司 DongGuan Konnra Electronics Co.,Ltd.			
					X.X ± 0.30		CHECKED:				
					X.XX ± 0.20		X.XXX ± 0.10	APPROVED:	PART NO.: U04S0016R		
	MARK	REVISION DESCRIPTION	SIGNATURE	DATE	Angle $\pm 2^\circ$	UNIT: mm	SCALE: 1:1	SHEET: 2/2	PROJECTION	REV.: A01	DRAWING NO.: U04S0016R-S